112-129 kW / 150-172 hp

The 1106C and 1106D provide a common solution to meeting the EU Stage IIIA and U.S. EPA Tier 3 emissions regulations, providing a choice of solutions from the Perkins® 1100 Series diesel engine platform.

These clean engines are assembled around optimal, efficient manufactuing processes with state-of-the-art technology. They are built to provide the exact power solution for customers who sell their applications into lesser regulated countries.

The new engines boast considerable increases to delivered power, torque and noise reduction. These have been achieved through changes to the manifold and combustion areas, turbocharger geometry, increased cylinder displacement.



Focusing on our common platform theme, changes to engine envelope dimensions and connection points have been kept to a minimum.

#### **Emissions**

Designed to fully comply with stringent emissions regulations, European EU Stage IIIA/U.S. EPA Tier 3.

Specification					
Number of cylinders	6 vertical in-line				
Bore and stroke	105 x 135 mm	4.13 x 5.3 in			
Displacement	7.01 litres	427.7 in <sup>3</sup>			
Aspiration	Turbocharged aftercooled				
Cycle	4 stroke				
Combustion system	Direct injection				
Compression ratio	18.2:1				
Rotation	Anti-clockwise, viewed on flywheel				
Total lubricating capacity	13-16 litres	3.4-4.2 US gal			
Cooling system	Liquid				
Total coolant capacity	ant capacity 15.2 litres 4 US gal				

112-129 kW / 150-172 hp

### Features and benefits

## Powered by your needs

- The Perkins 1106C-70TA delivers up to 162 kW (217 bhp) and the 1106D-70TA delivers up to 129 kW (172 bhp) and over 750 Nm (553 lb·ft) of torque, providing greater productivity through an improved power to weight ratio
- The availability of a large range of build options enables the product to be tailored to specific customer needs. Options include an SAE B PTO, providing up to 63 kW (85 bhp)

### Worldwide power solution

• The 1106C and 1106D have been designed to be worldwide fuel tolerant, including kerosene, jet aviation fuel and 20% biofuel (RME). Options are available to meet local market needs

#### Low installation costs

 The 1106C and 1106D are part of the Perkins common platform of engines, maintaining a variety of hook-up points similar to the EU Stage IIIB and U.S. EPA Tier 4 Interim 1206E-E70TTA. This commonality reduces the cost impact for the customer during the changeover process

#### Low operating costs

- Service intervals are set at 500 hours as standard
- Warranties and Service Contracts

We provide one-year warranties for constant speed engines and two-year warranties for variable speed models, as standard. These are supported by multilevel Extended Service Contracts that can be bought additionally. Discover more: www.perkins.esc

• Low usage warranty package is also available

## World class product support

- Through an experienced global network of distributors and dealers, fully trained engine experts deliver total service support around the clock, 365 days a year. They have a comprehensive suite of web based tools at their finger tips, covering technical information, parts identification and ordering systems, all dedicated to maximising the productivity of your engine
- Perkins actively pursues product support excellence by insisting our distribution network invest in their territory to provide you with a consistent quality of support across the globe
- Throughout the entire life of a Perkins engine, we provide access to genuine OE specification parts giving 100% reassurance that you receive the very best in terms of quality for lowest possible cost... wherever your Perkins powered machine is operating in the world
- To find your local distributor: www.perkins.com/distributor




112-129 kW / 150-172 hp

### Technical information

- Engine ratings
- SAE B PTO Drive
- Timing case and gear driven auxiliaries
- Flywheel housings
- Flywheel and starter rings
- Oil filter positions
- Adapter plates
- Starter motors
- Fan drives and locations
- Sound isolated lubricating oil sumps
- Lubricating oil filters and breathers
- Front-end drives
- Alternators
- Belt driven auxiliaries
- Induction manifolds
- Exhaust manifolds
- Fuel filter positions
- Cold start aids
- Engine mountings
- Power and torque curve tailoring
- Cooling packs
- Control panel
- Air compressor

112-129 kW / 150-172 hp

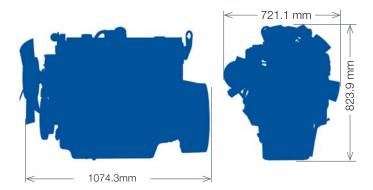

Engine package weights and dimensions with side-mounted turbocharger							
Length	1074.3 mm	42.3 in					
Width	721.1 mm	28.3 in					
Height	823.9 mm	32.4 in					
Weight (dry)	704 kg	1551 lb					

112-129 kW / 150-172 hp

Speed rpm	Power kW	Power hp	Speed rpm	Torque Nm	Torque lb·ft	Rating type
2200	112	150	1100	672	495	С
2000	118	158	1200	692	510	С
2000	129	172	1300	750	552	С