


4000 Series 4008TAG Diesel Engine – Electro Unit

787 kWm @ 1500 rpm net standby power

The Perkins® 4000 Series is a family of 6, 8, 12 and 16 cylinder diesel engines, designed to address today's uncompromising demands within the power generation industry with particular aim at the standby market sector.

Developed from a proven engine range that offers superior performance and reliability.

The 4008TAG is a turbocharged and air-to-air charge cooled, 8 cylinder diesel engine offered in an engine only configuration. Its premium features and design provide economic and durable operation as well as an exceptional power to weight ratio, excellent load acceptance and improved gaseous emissions, plus the overall performance and reliability characteristics essential to the power generation market.

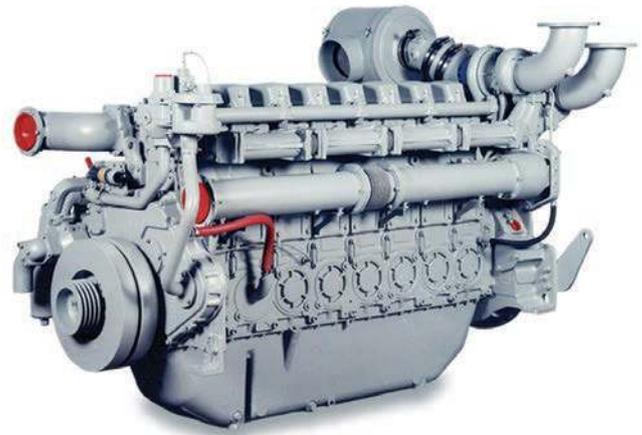

| Specification | | |
|----------------------------|---|----------------------|
| Number of cylinders | 8 vertical in-line | |
| Bore and stroke | 160 x 190 mm | 6.3 x 7.5 in |
| Displacement | 30.561 litres | 1865 in ³ |
| Aspiration | Turbocharged and air to air charge cooled | |
| Cycle | 4 stroke | |
| Combustion system | Direct injection | |
| Compression ratio | 13.6:1 | |
| Rotation | Anti-clockwise, viewed from flywheel end | |
| Total lubricating capacity | 153 litres | 40.4 US gal |
| Cooling system | Water-cooled | |
| Total coolant capacity | 48 litres | 12.7 US gal |

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification. All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.

Publication No. PN2174/06/16 Produced in England ©2016 Perkins Engines Company Limited

 **Perkins®**

THE HEART OF EVERY GREAT MACHINE

4000 Series 4008TAG Diesel Engine – Electro Unit

787 kWm @ 1500 rpm net standby power

Features and benefits

Dependable power

- Individual 4 valve cylinder heads giving optimised gas flows
- Unit fuel injectors ensure ultra fine fuel atomisation and hence controlled rapid combustion
- Commonality of components with other engines in the 4000 Series family for reduced stocking levels
- Capable emissions of 1/2 TA Luft (1986)

Low operating costs

- Oil change service intervals are set at 500 hours as standard
- Designed to provide low cost of ownership, simple maintenance and reduced downtime

Class leading warranty

Prime power - 12 months unlimited hours. For engines that operate less than 6,000 hours the warranty is available for two years or until the application reaches 6,000 hours (whichever is sooner).

Standby power - three years or 1,500 hours (whichever is sooner).

See Perkins Warranty Policy for further details

Perkins Platinum Protection - comprehensive cover from as little as 5 percent* of the cost of your engine

Talk to your local distributor or visit www.perkins.com/platinum-protection for more details

World class product support

- Our experienced global network of distributors and dealers, fully trained engine experts deliver total service support around the clock, 365 days a year. They have a comprehensive suite of web based tools at their disposal, covering technical information, parts identification and ordering systems, all dedicated to maximising the productivity of your engine
- Perkins actively pursues product support excellence by insisting our distribution network invest in their territory to provide customers with a consistent quality of support across the globe
- Throughout the entire life of a Perkins engine, we provide access to genuine parts giving 100% reassurance that you receive the very best in terms of quality for lowest possible cost, wherever your Perkins powered machine is operating in the world

To find your local distributor: www.perkins.com/distributor

* Terms and conditions apply

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN2174/06/16 Produced in England ©2016 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

4000 Series 4008TAG Diesel Engine – Electro Unit

787 kWm @ 1500 rpm net standby power

Technical information

Air inlet

- Mounted air filter and turbocharger

Fuel system

- Direct fuel injection system with fuel lift pump
- Digital governing to ISO 8528-5 Class G2 with isochronous capability
- Full flow spin-on fuel oil filters

Lubrication system

- Wet sump with filler and dipstick
- Full-flow spin-on oil filters
- Engine jacket water/lub oil temperature stabiliser

Cooling system

- Twin thermostats
- System designed for ambient temperatures of up to 50°C

Electrical equipment

- 24V starter motor and 24V alternator with integral regulator and DC output
- Turbine inlet temperature protection
- High coolant temperature protection switch
- Low oil pressure protection switch

Flywheel and housing

- Flywheel to SAE J620 size 18
- SAE 0 flywheel housing

Optional equipment

- 4 metre wiring harness
- Secondary electric start
- Immersion heater
- Single exhaust outlet pipe
- Exhaust counter flanges
- Temperate and tropical radiator kit

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.


Publication No. PN2174/06/16 Produced in England ©2016 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

4000 Series 4008TAG Diesel Engine – Electro Unit

787 kWm @ 1500 rpm net standby power

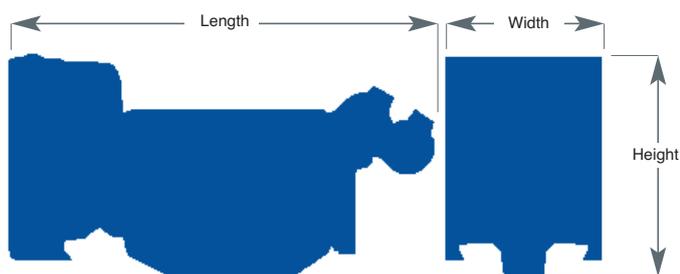

| Engine package weights and dimensions | | | | |
|---------------------------------------|--------------|---------|------------|----------|
| | Electro unit | | ElectropaK | |
| Length | 2879 mm | 113 in | 3780 mm | 148.8 in |
| Width | 1571 mm | 61.8 in | 1630 mm | 64.2 in |
| Height | 1760 mm | 69.2 in | 2193 mm | 86.3 in |
| Weight (dry) | 3120 kg | 6878 lb | 3730 kg | 8223 lb |

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification.
All information in this document is substantially correct at time of printing and may be altered subsequently.
Final weight and dimensions will depend on completed specification.

Publication No. PN2174/06/16 Produced in England ©2016 Perkins Engines Company Limited

 **Perkins**[®]

THE HEART OF EVERY GREAT MACHINE

4000 Series 4008TAG Diesel Engine – Electro Unit

787 kWm @ 1500 rpm net standby power

| Speed rpm | Type of operation | Typical generator output (Net) | | Engine power | | | |
|-----------|-------------------|--------------------------------|-----|--------------|------|-----|------|
| | | | | Gross | | Net | |
| | | kVA | kWe | kWm | hp | kWm | hp |
| 1500 | Baseload power | 672 | 538 | 595 | 798 | 566 | 759 |
| | Prime power | 849 | 679 | 744 | 998 | 715 | 959 |
| | Standby (maximum) | 935 | 748 | 816 | 1094 | 787 | 1055 |

The above ratings represent the engine performance capabilities guaranteed within plus or minus 3% at the reference conditions equivalent to those specified in ISO 8528/1, ISO 3046/1, BS 5514/1.

Ratings conditions: 25°C air inlet temperature, barometer pressure 100 kPa, relative humidity 30%. Please consult your distributor or the factory for ratings in ambient conditions. *Note: For full ratings please refer to Perkins Engines Company Limited. All electrical ratings are based on an average alternator efficiency and a power factor of 0.8.* **Fuel specification:** BS 2869 Class A1 + A2 or ASTM D975 No 2D.

Rating definitions

Baseload power: Power available for continuous full load operation. No overload is permitted. **Prime power:** Power available for variable load with an average load factor not exceeding 80% of the prime power rating in any 24 hour period. Overload of 10% permitted for 1 hour in every 12 hours operation. **Standby (maximum):** Power available at variable load in the event of a main power network failure for a maximum of 500 hours per year. No overload is permitted.

| Percent of prime power | Fuel consumption at 1500 rpm g/kWh | Fuel consumption at 1500 rpm l/hr |
|------------------------|---------------------------------------|--------------------------------------|
| Standby (maximum) | 213 | 204 |
| Prime power | 212 | 185 |
| Baseload power | 205 | 143 |
| 75% | 203 | 133 |
| 50% | 210 | 92 |
| 25% | 220 | 48 |

www.perkins.com

Photographs are for illustrative purposes only and may not reflect final specification. All information in this document is substantially correct at time of printing and may be altered subsequently. Final weight and dimensions will depend on completed specification.

Publication No. PN2174/06/16 Produced in England ©2016 Perkins Engines Company Limited



THE HEART OF EVERY GREAT MACHINE