

GF-PRO-150-0999 Generator



Output Prime kVA	150
Output Prime kW	120
Enclosure Type	Rental
Fuel Capacity (L)	590
Fuel Cons L/hr 100% Prime	33.4
Run HRs 100% Prime	17.7
Fuel Cons. @ 75% Load (L/Hr)	24.7
Fuel Cons. 50% Load (L/Hr)	16.4
Bunded	Yes

Generator Configuration

Voltage	415
Control Panel	DSE7310
Base Tank Type	Bunded
Circuit Breaker	4 Pole
Mains Charger	Yes
Lifting Frame	Yes
Forklift Pocket Skid	Yes
Water Jacket Heater	No

Alternator Data

Alternator Brand	LeRoy Somer
Alternator Model	LL3114J
Prime Amps per ϕ	208
AVR Model	R250
Volt Reg	+/- 0.5%
Insulation Class	H
Winding Pitch	2/3
Excitation	Shunt
Frequency (Hz)	50

Engine Data

Engine Brand	Perkins
Engine Model	1106D-E70TAG3
Number of Cylinders	6 - In Line
Governor	Electronic
Induction	Turbocharged
Compression ratio	18.2:1
Displacement	7.00
Alternator Charge Amp	85
Filter Type (Fuel)	Replaceable Element
Fuel Class	A2 Diesel
Air Filter Type	Replaceable Element
Oil Filter Type	Spin On Full Flow
Total Oil Capacity	12.40
Oil Type	API CG4/CH4 15W-40

Prime Rating


These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standard Reference Conditions

Note: Standard reference conditions 25°C Air Inlet Temp, 100m MASL, 30% Relative Humidity, dB(A) are free field.

Mains Failure Transfer Panel (Option)	AT1250
Noise (dBA) @ 1m 100% Load	77
Noise (dBA) @ 1m 75% Load	77
Noise (dBA) @ 7m 100% Load	65
Noise (dBA) @ 7m 75% Load	64

LENGTH	3620mm	WIDTH	1120mm
HEIGHT	2226mm	DOOR	1000mm
WEIGHT	3050kg		

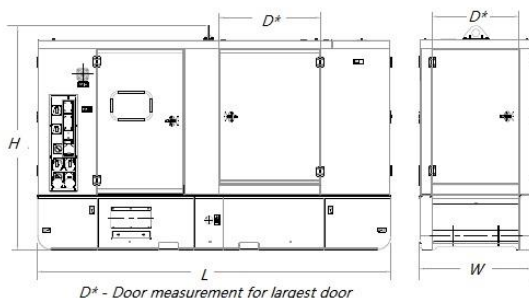

D* - Door measurement for largest door

Scan QR code for product info

