

GF-PRO-30-0999 Generator



Output Prime kVA	30
Output Prime kW	24
Enclosure Type	Rental
Fuel Capacity (L)	162
Fuel Cons L/hr 100% Prime	7.2
Run HRs 100% Prime	22.5
Fuel Cons. @ 75% Load (L/Hr)	5.6
Fuel Cons. 50% Load (L/Hr)	4.1
Bunded	Yes


Generator Configuration

Voltage	415
Control Panel	DSE7310
Base Tank Type	Bunded
Circuit Breaker	4 Pole
Mains Charger	Yes
Lifting Frame	Yes
Forklift Pocket Skid	Yes
Water Jacket Heater	No

Alternator Data

Alternator Brand	LeRoy Somer
Alternator Model	LL1514F
Prime Amps per ϕ	41
AVR Model	R250
Volt Reg	+/- 0.5%
Insulation Class	H
Winding Pitch	2/3
Excitation	Shunt
Frequency (Hz)	50

LENGTH	2150mm	WIDTH	1120mm
HEIGHT	1583mm	DOOR	990mm
WEIGHT	1370kg		

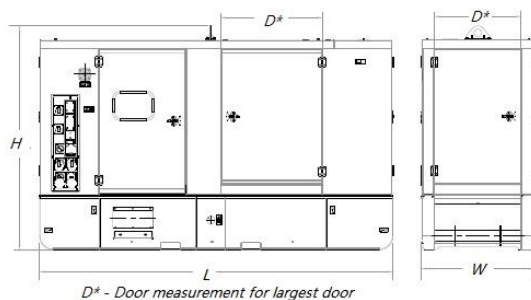

Engine Data

Engine Brand	Perkins
Engine Model	1103A-33TG1
Number of Cylinders	3 - In Line
Governor	Electronic
Induction	Naturally Aspirated
Compression ratio	19.25:1
Displacement	3.30
Alternator Charge Amp	65
Filter Type (Fuel)	Replaceable Element
Fuel Class	A2 Diesel
Air Filter Type	Replaceable Element
Oil Filter Type	Spin On Full Flow
Total Oil Capacity	7.00
Oil Type	API CG4/CH4 15W-40

Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standard Reference Conditions

Note: Standard reference conditions 25°C Air Inlet Temp, 100m MASL, 30% Relative Humidity, dB(A) are free field.

Mains Failure Transfer Panel (Option)	CT1125
Noise (dBA) @ 1m 100% Load	71
Noise (dBA) @ 1m 75% Load	71
Noise (dBA) @ 7m 100% Load	61
Noise (dBA) @ 7m 75% Load	60

Scan QR code
for product info

