

# GF-P16.5-6S-998H Generator



Output Prime kVA	15
Output Prime kW	15
Enclosure Type	CALG2-Hinged
Fuel Capacity (L)	55
Fuel Cons L/hr 100% Prime	4.9
Run HRs 100% Prime	11.2
Fuel Cons. @ 75% Load (L/Hr)	3.7
Fuel Cons. 50% Load (L/Hr)	2.7
Bunded	D/Skin Tank

## Generator Configuration

Voltage	240
Control Panel	Comap MRS-16
Base Tank Type	DB4
Circuit Breaker	3 Pole
Mains Charger	Yes
Lifting Frame	Yes
Forklift Pocket Skid	Yes
Water Jacket Heater	No

## Alternator Data

Alternator Brand	LeRoy Somer FGW
Alternator Model	FGL10060_1ph
Prime Amps per $\phi$	62
AVR Model	R121
Volt Reg	+/- 1.0%
Insulation Class	H
Winding Pitch	2/3
Excitation	Shunt
Frequency (Hz)	50

## Engine Data

Engine Brand	Perkins
Engine Model	404D-22G
Number of Cylinders	4 - In Line
Governor	Mechanical
Induction	Naturally Aspirated
Compression ratio	23.3:1
Displacement	2.20
Alternator Charge Amp	65
Filter Type (Fuel)	Replaceable Element
Fuel Class	A2 Diesel
Air Filter Type	Replaceable Element
Oil Filter Type	Spin-On, Full Flow
Total Oil Capacity	10.60
Oil Type	API CH4 15W-40

## Prime Rating


These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

## Standard Reference Conditions

Note: Standard reference conditions 25°C Air Inlet Temp, 100m MASL, 30% Relative Humidity, dB(A) are free field.

Mains Failure Transfer Panel (Option)	CTI_1-125
Noise (dBA) @ 1m 100% Load	75
Noise (dBA) @ 1m 75% Load	74
Noise (dBA) @ 7m 100% Load	64
Noise (dBA) @ 7m 75% Load	63

LENGTH	1755mm	WIDTH	935mm
HEIGHT	1205mm	DOOR	920mm
WEIGHT	670kg		

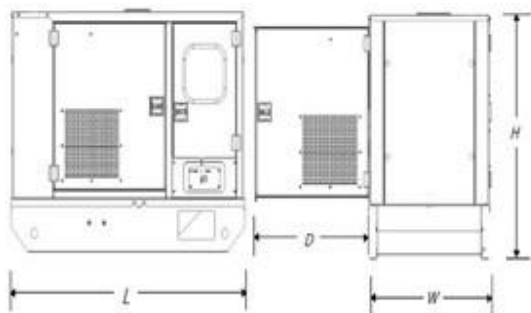

Scan QR code  
for product info

