

# GF-P88-3-0999 Generator



Output Prime kVA	80
Output Prime kW	64
Enclosure Type	CAL/G Metal Canopy
Fuel Capacity (L)	254
Fuel Cons L/hr 100% Prime	18.2
Run HRs 100% Prime	14.0
Fuel Cons. @ 75% Load (L/Hr)	13.6
Fuel Cons. 50% Load (L/Hr)	9.5
Bunded	Yes


## Generator Configuration

Voltage	415
Control Panel	Comap MRS-16
Base Tank Type	Bunded-FB6
Circuit Breaker	4 Pole
Mains Charger	Yes
Lifting Frame	Yes
Forklift Pocket Skid	Yes
Water Jacket Heater	No

## Alternator Data

Alternator Brand	LeRoy Somer
Alternator Model	LL3114D
Prime Amps per $\phi$	111
AVR Model	R250
Volt Reg	+/- 0.5%
Insulation Class	H
Winding Pitch	2/3
Excitation	Shunt
Frequency (Hz)	50

LENGTH	2291mm	WIDTH	1126mm
HEIGHT	1848mm	DOOR	1000mm
WEIGHT	1510kg		

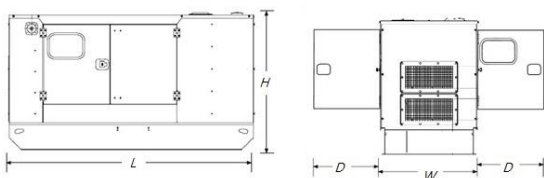

## Engine Data

Engine Brand	Perkins
Engine Model	1104A-44TG2
Number of Cylinders	4 - In Line
Governor	Mechanical
Induction	Turbocharged
Compression ratio	17.25:1
Displacement	3.30
Alternator Charge Amp	65
Filter Type (Fuel)	Replaceable Element
Fuel Class	A2 Diesel
Air Filter Type	Replaceable Element
Oil Filter Type	Spin-On, Full Flow
Total Oil Capacity	8.00
Oil Type	API CG4/CH4 15W-40

## Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

## Standard Reference Conditions

Note: Standard reference conditions 25°C Air Inlet Temp, 100m MASL, 30% Relative Humidity, dB(A) are free field.

Mains Failure Transfer Panel (Option)	CT1125
Noise (dBA) @ 1m 100% Load	79
Noise (dBA) @ 1m 75% Load	77
Noise (dBA) @ 7m 100% Load	67
Noise (dBA) @ 7m 75% Load	65

Scan QR code  
for product info

