97 kW / 130.1 hp

The 1100 Series engine family is the successor to the very successful New 1000 Series. It has been inspired by and led by the future requirements of our customers to meet the needs of the construction, materials handling, agricultural/turf and genset markets.

Built to the most demanding standards, the 1100 Series engines meets all the requirements of both EC Stage II and USA EPA Tier 2 off-highway emissions legislation for 2003 and brings significant improvements over the 1100 Series highly successful predecessors.

The 1104C-44TA is a quiet 4.4 litre unit delivering improved performance and reduced operating costs in an efficient package ideal for a range of off-highway applications.



Specification			
Number of cylinders	4 in-line		
Bore and stroke	105 x 127 mm	4.3 x 5.0 in	
Displacement	4.4 litres	269 in <sup>3</sup>	
Aspiration	Turbocharged, air-to-air charge cooled		
Cycle	4 stroke		
Combustion system	Direct injection		
Compression ratio	18.2:1		
Rotation	Anti-clockwise, viewed on flywheel		
Cooling system	Pressurised water		
Total coolant capacity	7 litres	1.9 US gal	

97 kW / 130.1 hp

#### Features and benefits

#### Class leading performance

• Surpassing even its highly successful predecessors, this exciting range adds up to 41% more low speed torque and 32% additional torque back-up depending on model

#### Cleaner and quieter

- The new timing gear train, cylinder block design and use of sound-deadened materials are just some aspects of reducing bare engine noise by up to 3 dBA across the speed range
- High quality filtration of both oil and fuel improves reliability and uses a disposable inner element for cleaner, simpler servicing
- Certified to emissions standards, these engines lower smoke to a point barely visible to the naked eye

#### Quality by design

• 'Now designed for assembly' simplified sub-assemblies, improved joint and sealing technologies enhance both reliability and durability

#### Ease of installation

 Minimising installation issues in machine changeover, envelope size and mounting points easily accommodate the update from earlier generation products

#### Lower operating costs

- Service intervals are now set at 500 hours as standard
- Fuel economy is improved by as much as 6%
- Warranties and Service Contracts

We provide one-year warranties for constant speed engines and two-year warranties for variable speed models, as standard. These are supported by multilevel Extended Service Contracts that can be bought additionally Discover more: www.perkins.esc

#### Product support

- Perkins actively pursues product support excellence by ensuring our distribution network invest in their territory strengthening relationships and providing more value to you, our customer
- Through an experienced global network of distributors and dealers, fully trained engine experts deliver total service support around the clock, 365 days a year. They have a comprehensive suite of web based tools at their fingertips covering technical information, parts identification and ordering systems, all dedicated to maximising the productivity of your engine
- Throughout the entire life of a Perkins engine, we provide access to genuine OE specification parts and service. We
  give 100% reassurance that you receive the very best in terms of quality for lowest possible cost .. wherever your
  Perkins powered machine is operating in the world
- To find your local distributor: www.perkins.com/distributor



97 kW / 130.1 hp

#### Technical information

- Cast iron engine block
- Flywheel and flywheel housing
- Glow plug starting aid
- 12 and 24 volt alternator 55, 65, 85, 100 amp
- Provision for PTOs
- Choice of cooling fans
- 12 and 24 volt starter motor
- Plastic J2044 fuel system standard
- Choice of turbo outlet orientation
- Choice of lub oil sump
- Choice of dipstick positions (left or right)
- Choices of filler positions
- Choice of water outlet
- Balancer or non-balancer
- Integral Inlet manifold
- Cast iron exhaust manifold centre side outlet
- Gear driven coolant pump

#### Option groups

A selection of optional items is available to enable the customer to prepare a specification precisely matched to customer needs. These involve alternative ratings, exhaust outlets, a range of flywheels and flywheel housings to suit various clutches and transmissions and a selection of power take-offs.




Photographs are for illustrative purposes only and may not reflect final specification.

All information in this document is substantially correct at time of printing and may be altered subsequently.

Final weight and dimensions will depend on completed specification.




97 kW / 130.1 hp

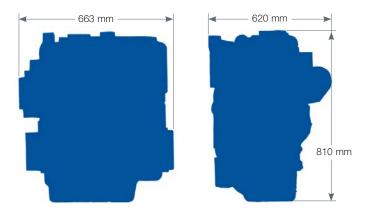

Engine package weights and dimensions			
Length	663 mm	26.1 in	
Width	620 mm	24.4 in	
Height	810 mm	32.0 in	
Weight (dry)	306 kg	674.6 lb	

97 kW / 130.1 hp

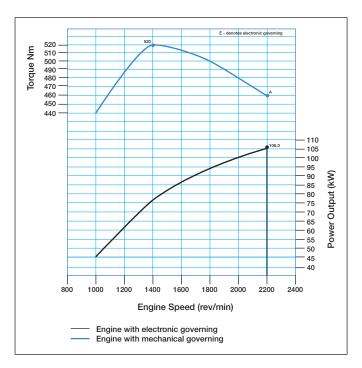

Performance data	Gross intermittent (ISO/TR 14396)	Speed rpm
Power output (kW)	97.0	2200
Power output (hp)	130.1	2200
Peak torque (Nm)	500.0	1400
Peak torque (lbf·ft)	369.0	1400

Power output for a run-in engine after 60 hours

